

Specifications

	ST-7000-WM-1C MODEL	ST-7000-WM-2E MODEL	ST-7000-WM-F MODEL
CPU	Celeron 1.2GHz	Celeron 2.0GHz	Pentium 2.8GHz
Memory	128MB,2slots(max.2GB)	256MB,2slots(max.2GB)	2slots(max.2GB)
	PC2100/PC2700 DDR SDRAM without ECC	PC2100/PC2700 DDR SDRAM with ECC	PC2100/PC2700 DDR SDRAM with ECC
Interface	RS-232C×2,Powered RS-232C×2, (option Powered RS-232C×2)	RS-232C×2,Powered RS-232C×3 (option Powered RS-232C×1)	RS-232C×2,Powered RS-232C×3 (option Powered RS-232C×1)
	Powered USB Option(12V×3 & 24V×1 or 24V×1)	Powered USB 12V×3,24V×1	Powered USB 12V×3,24V×1
	USB×1 Version2.0(front)	USB×2 Version2.0(front & rear)	USB×2 Version2.0(front & rear)
	VGA×1	VGA×1	VGA×1
	Parallel×1	Parallel×1	Parallel×1
	Drawer×2	Drawer×2	Drawer×2
	PS/2 Keyboard	PS/2 Keyboard & PS/2 Mouse	PS/2 Keyboard & PS/2 Mouse
	LAN(10BASE-T/100BASE-TX)	LAN(10BASE-T/100BASE-TX)	LAN(10BASE-T/100BASE-TX)
	Line-out/Mic-in Option	Line-out/Mic-in	Line-out/Mic-in
Expansion Slot	PCI×2	PCI×2	PCI×2
FDD	Option(external)	Option(external)	Option(external)
HDD	Option(3.5"×2 bays)	Option(3.5"×2 bays)	Option(3.5"×2 bays)
CD-R/RW	Option(mount kit)	Option(mount kit)	Option(mount kit)
Dual Display Interface	Option(LVDS)	Option(DVI-D/LVDS)	Option(DVI-D/LVDS)
AC outlet	Yes	Yes	Yes
Printer Power Supply	+24V OUT	+24V OUT	+24V OUT
UPS	No	Option	Option
Dimensions	315(W)×466(D)×112.5(H)mm	315(W)×466(D)×112.5(H)mm	315(W)×466(D)×112.5(H)mm
	12.4(W)×18.3(D)×4.4(H)inch	12.4(W)×18.3(D)×4.4(H)inch	12.4(W)×18.3(D)×4.4(H)inch
Weight	9.5kg,21lbs(excluding options)	9.5kg,21lbs(excluding options)	9.5kg,21lbs(excluding options)
Support OS	Windows 2000,Windows XP,MS-DOS V6.22, Certified Linux	Windows 2000,Windows XP,MS-DOS V6.22, Certified Linux	Windows 2000,Windows XP,MS-DOS V6.22, Certified Linux

Peripherals

Display



TFTST-56



LKBST-65



LIUST-51



LIUST-53

Drawer



DRWST-51A



DRWST-56

Printer



TRJST-52



TRST-56

Keyboard



PKBST-50

TOSHIBA TEC CORPORATION

Retail Information Systems Company

International Operations Division

Oval Court Ohsaki Mark East
2-17-2, Higashi Gotanda, Shinagawa-ku, Tokyo, 141-8664 Japan


<http://www.toshibatec.com>

TOSHIBA




ST-7000

High Performance Retail Advantage



- Powered USB
- RS-232C(option)
- Line-out, Mic-in
- PCI slot
- 24 V power for printer
- 6 RS-232C
- 7 Parallel
- 8 VGA
- 9 Dual screen (option)
DVI-D ' LVDS
- 10 Drawer
- 11 LAN
- 12 USB
- 13 PS/2 mouse
PS/2 keyboard
- 14 AC Outlet
- 15 AC Inlet

■ ST-7000-WM-1C MODEL

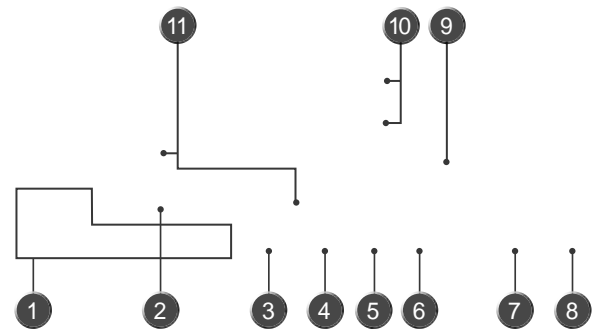

- 1 RS-232C
- 2 Parallel
- 3 VGA
- 4 LAN
- 5 Drawer
- 6 PS/2 keyboard
- 7 AC Outlet
- 8 AC Inlet
- 9 24 V power for printer
- 10 PCI slot
- 11 LVDS+USB board slot